Charging Battery)

Battery)

Average Input Power (Not Charging 2.7W






Input Parameters	
Input Voltage Range	220-240 Vac
Input Current	<0.03A
Power Factor	> 0.32
Frequency	50Hz
Ambient Temperature	40C
Ambient Temperature	0-40C
Class	II
Maximum Input Power (While	3.5W

DALI Parameters	
Input Current	2 mA
Over Voltage Protection	Yes
Input Voltage	9.5 - 22.5 Vdc


Emergency Parameters	
Emergency Duration	180minutes
Battery Code(s)	zc-batt-1A1-ACA
Battery Type	LiFePO4
Input Battery Voltage	2.0-4.0 Vdc
Output Battery Voltage	2.0-3.65 Vdc
Input Battery Current	330mA
Output Battery Current	0.08A
Charging Time	24 hours
Emergency Output Power	1.2 W


Mechanical	
Material	Polycarbonate
Product Colour	RAL7035
Wiring Type	Push Terminal (0.5-2.5mm2)
Mounting	Surface Mount
Ingress Protection	IP65
Product Dimension Length	351mm
Product Dimension Height	58mm
Product Dimension Width	116mm


## **Product Line Drawing**



## **Product Install Picture**



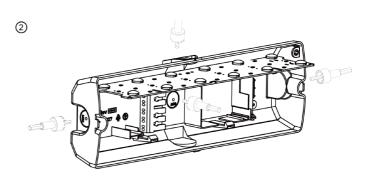

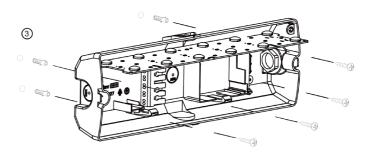




Standards	
IEC 60598-1	Yes
IEC 60598-2-22	Yes
IEC 62034	Yes


## Required Safety Warnings

- · This product must only be installed by a licensed electrician.
- · Before commencing installation turn off and isolate the electrical supply
- $\cdot$  Risk of accidental contact with live parts. Do not energise with product open or disassembled.
- · The only replaceable part is the battery
- $\cdot$  Do not attempt to service other parts of the fitting as this will void the warranty.
- $\cdot$  After installation allow the battery to charge for 24 hours before carrying out discharge testing.
- $\cdot$  Warning: all maintenance, such as battery change on this luminaire, to be performed by qualified personnel only. De-energise all supplies before maintenance.
- · As the installer, it is your responsibility to ensure you comply to all relevant building and safety codes. for example the BCA, AS3000
- $\cdot$  The replacement of the battery is needed when they no longer meet their rated duration of operation after the corresponding recharge period.
- $\cdot$  Dongguan Evolt Electronics Co., Ltd. No.3 Qinghu East Road Yuliangwei Village, Qingxi TownDongguan City, Guangdong, China 523649



## Wiring Diagram

4



Strip length referce: 8-10mm Wire range: 0.5-2.5mm²□

