



Input Parameters

Input Voltage Range	220-240 Vac
Input Current	<0.04A
Frequency	50Hz
Ambient Temperature	40C
Ambient Temperature	0-40C
Class	I
Maximum Input Power (While Charging Battery)	<3.5W
Average Input Power (Not Charging Battery)	<2.0W

Emergency Parameters

Emergency Duration	180minutes
Battery Code(s)	zc-batt-2B1-AAA
Battery Type	LiFePO4
Input Battery Current	650mA
Output Battery Current	0.15A
Charging Time	24 hours


Mechanical

Material	Polycarbonate
Wiring Type	Terminal Block (0.5-6.0mm2)
Mounting	Wall Mount
Ingress Protection	IP65
Product Dimension Length	279mm
Product Dimension Height	321mm
Product Dimension Width	129mm

Standards

IEC 60598-1	Yes
IEC 60598-2-22	Yes
IEC 62034	Yes

Product Line Drawing

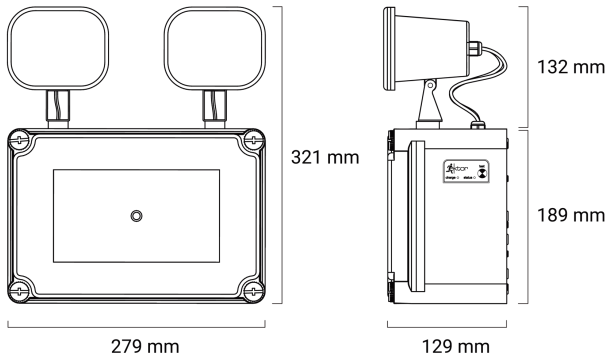



Packaging	
Carton Length	0..
Carton Width	0..
Carton Height	0..
Unit Net Weight	0.00kg
Carton Gross Weight	0.00..
EAN 13	
EAN 14	
Carton Quantity	Carton 4